



Rev010.23

TECHNICAL DESCRIPTION

Cubicle “ESSENTIAL” is linear, sturdy and easy to install.

Made with 14mm thick hpl panels, with smoothed edges and rounded corners is made in a combination of colors of your choice among our standards.

The hardware is made of anodized aluminum (6060 T5).

The doors are equipped with self-approaching hinges with adjustable spacer, soft-close system via damper piston, flush recessed lock in AISI 316 stainless steel with free/engaged indicator and integrated emergency opening, vandal-proof solid round lever (inside).

The feet, positioned only on the partitions and covered with a protective silver coloured casing, are in anodized aluminum (6060 T5) 200mm high, adjustable and have a diameter of 65mm.

The upper stabilizing bar, also in aluminum has a groove to incorporate the pilasters, giving strength to the overall.

The height of the cubicle is 2100mm from the floor to the top of the stabilizing bar.




ESSENZIALE - External view




Technical drawings (mm /inch)


Frontal view

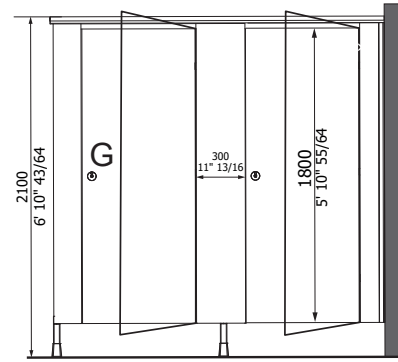


Side view

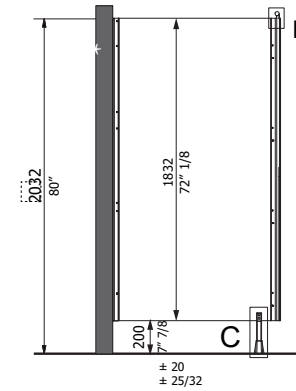


Plan

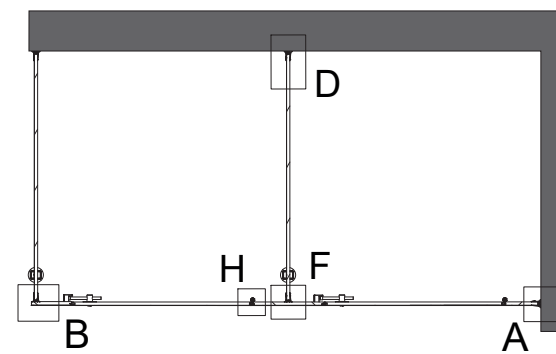


B. Frontal part/
side partition
fixing




D. Partition/back wall
fixing.





A. Frontal part/wall fixing.



C. Leg/floor
fixing



E. Chain profile
of superior
support.




ESSENZIALE - Internal view




Frontal part/partition fixing (F).




Partition/back wall fixing (D).



Frontal part/side partition fixing (B)



Lever lock (Vista interna G).



Digitized graphic OPTION

General characteristics

Cubicles in HPL and aluminum profiles with a standard height of 2100mm.

Technical features


- Cubicles made of 14mm thick HPL stratified laminate with "scratch-proof" finish, smoothed edges and rounded corners.
- Vertical silver anodized aluminum profiles and stabilizing bar enclose and fix on the thickness of the 14mm HPL panels.
- Standard feet height 200mm, diameter 60mm. Aluminum feet adjustable by steel pin with nylon base.
- PDoors with self-approaching hinges with adjustable spacer, soft-close system, recessed flush lock in AISI 316 stainless steel with indicator free/engaged and integrated emergency opening, vandal-proof solid round lever (inside).
- Possibility of arranging the partitions for the assembly of accessories (coat hangers, dispensers toilet paper...).
- Standard colors in the catalogue or special colors on request, subject to feasibility by the company.

Options:


- Remotely visible LED free/busy indicator built into the lock, powered by battery (approximately 3 years life): box free=led off/box occupied=red led flashing.
- Profiles: titanium anodized or RAL painted with epoxy powder paints.
- Box height from the ground less than 200mm.
- Custom and non-coplanar box widths and depths.
- Pictograms on the doors (engraved or adhesive).
- Pre-printed walls or doors with "standard" texture.
- Digital printing on demand with customer supplied file (100dpi).

**For further details, please see Products Catalogue.


Leg/floor fixing (C).

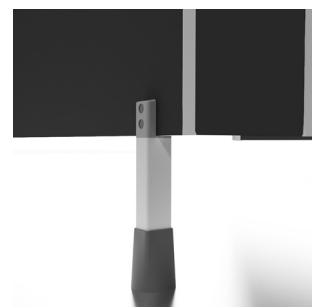


Frontal part/partition fixing (F).

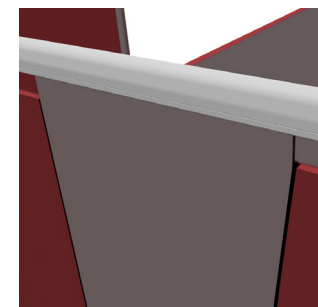

Frontal part/wall fixing (A).



Frontal part/side partition fixing (B).



Lever lock (external view G).



Hinge with shock absorber



*The structure hosting box installation, if necessary, should be adequately reinforced